



The BATIPLUS wallform is specially designed for low-rise walls (4.8m max). Economical and robust, its design allows it to be compatible with the latest B8000 wallforms range. The BATIPLUS ensures the same safety level of the B8000 wallforms.

QUICK ERECTION

- Ready to use
- Integrated safety & accessories

ECONOMICAL

- High number of reuses
- Simplified formwork sizes
- No consumable items

STRONG

- Strong frame and steel profiles
- Torsional strength

INTEGRATED SAFETY

- Foldaway guardrails
- Lateral gates
- Access ladder and hatch




SPECIFICATIONS

Width (m)	Height (m)			
	2,8	1,5	1	0,5
2,5	X	X	X	X
1,25	X	X	X	X
0,625	X	X	X	X


Table of the standard shutter dimensions

- The BATIPLUS is compatible with Outinord standard 1.2m lifting device
- 1.25m shutters are also available without hatch & access ladder
- Average weight of the shutter: 120kg/m² (2.8m x 2.5m)
- Standard colors: black / orange


Superimposition possibilities:

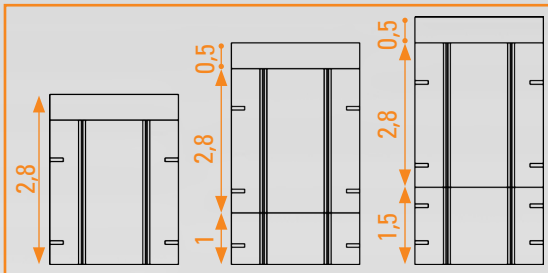

Designed for 8T/m² concrete pour pressure

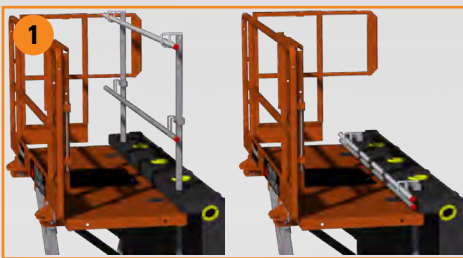

Foldaway safety guardrails and concreting platform with access hatch.

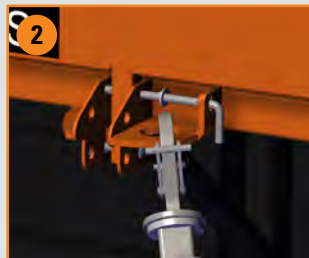

Push-pull struts fixing.




High quality powder coating paint U.V. & shock resistant.




Horizontal coupling through a captive male and female mechanical aligning and levelling bolt.




Foldaway storage wedge with non-slip runner.

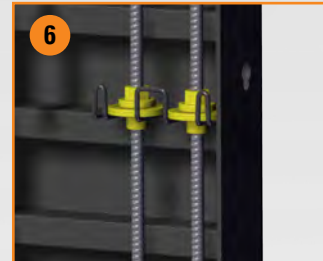

Tie-rod storage.

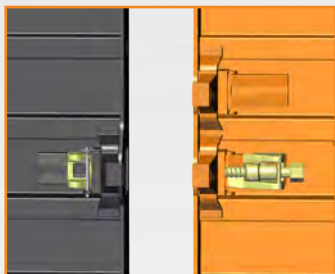

Horizontal coupling compatible with B8000 evo 3 & 4 wallforms.

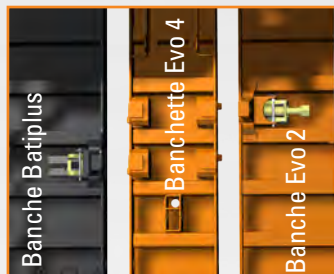

Horizontal coupling compatible with B8000 evo 2 through a formwork adapter.



Transportable by standard freight, 6 stacked shutters, 24 shutters per truck trailer (2.8m x 2.5m).

The BATIPLUS wallforms are designed in accordance with the requirements of the NFP93-350 standard, June 1995. The shutters meet the R399 CNAMTS recommendation adopted by the National Technical Committee of Building Industry and Public Works, June 2003.